

## Features

- Complete Touchscreen Module:
  - Projected Capacitive Multi Touch Controller
  - 4.3in LCD
  - 4 Capacitive “Navigation” Keys
  - 200 bytes non-volatile serial EEPROM
- Touch:
  - Microchip maXTouch™ mXT336T Touch Controller
  - Supports up to 10 touches
- Display:
  - 480x272 resolution
  - Himax HX8257-A driver IC
  - 30 ms response time
  - White LED backlight
- Navigation Keys:
  - Microchip AT42QT1070 QTouch™ Button Sensor IC
- Cover Panel:
  - 2mm Soda Lime

90-00123-B1 includes MEB Adapter for Microchip PIC32MZ MEB II Kit



## PDA TM4301B: 4.3in PCAP Touch Module

P/N: 90-00123-A0  
90-00123-B1



Doc: 111-00221-A1



Visit <http://www.pdaatl.com/tm4301b>  
for the latest information on the TM4301B



## Contents


|       |                                            |    |
|-------|--------------------------------------------|----|
| 1     | Module Overview                            | 4  |
| 1.1   | PCB Connections                            | 4  |
| 1.2   | Host Interface J1                          | 5  |
| 1.3   | Touch Interface Connector J2               | 6  |
| 1.4   | Module Interface Connector S-J1            | 6  |
| 1.5   | Navigation Button Connector J3 & J4        | 7  |
| 1.6   | Display Flex Connector J5                  | 8  |
| 1.7   | Touch Sensor Flex Connector S-J2           | 9  |
| 2     | Overview of the 4.3in PCAP Touch Module    | 10 |
| 2.1   | Introduction                               | 10 |
| 2.2   | Understanding Unfamiliar Concepts          | 11 |
| 2.3   | LCD Panel                                  | 11 |
| 2.4   | maXTouch Capacitive Touchscreen Controller | 11 |
| 2.4.1 | maXTouch Controller Interface              | 11 |
| 2.5   | QTouch Capacitive Button Controller        | 12 |
| 2.5.1 | QTouch Controller Interface                | 12 |
| 2.6   | Serial EEPROM                              | 12 |
| 3     | Getting Started                            | 13 |
| 3.1   | Hardware Connections                       | 13 |
| 3.1.1 | Microchip XPRO Kits                        | 13 |
| 3.1.2 | Microchip PIC32MZ Kits                     | 13 |
| 3.2   | Software                                   | 15 |
| 3.2.1 | MPLab Harmony Framework                    | 15 |
| 3.2.2 | Linux Kernel / Android                     | 15 |
| 3.2.3 | Advanced Software Framework                | 15 |
| 3.2.4 | Microchip Software Packages                | 15 |
| 3.3   | Using the Touch Module                     | 15 |
| 3.3.1 | Navigation Keys                            | 15 |
| 3.3.2 | Evaluating the Touch Module                | 15 |
| 4     | Specifications                             | 17 |
| 4.1   | Mechanical Specifications                  | 17 |
| 4.2   | Absolute Maximum Specifications            | 19 |
| 4.3   | Recommended Operating Conditions           | 19 |
| 4.4   | DC Specifications                          | 19 |
| 4.5   | I2C-compatible Bus Specifications          | 20 |

|       |                                                      |    |
|-------|------------------------------------------------------|----|
| 4.6   | LCM Specification                                    | 20 |
| 4.6.1 | LCM Parameters                                       | 20 |
| 4.6.2 | LCM Absolute Maximum Specifications                  | 21 |
| 4.6.3 | LCM DC Specifications                                | 21 |
| 4.6.4 | LCM Optical Characteristics                          | 21 |
| 4.6.5 | LCM Timing                                           | 22 |
| 4.7   | Power Consumption                                    | 22 |
| 4.8   | Part Number                                          | 22 |
| 5     | I2C Basics (I2C-compatible Operation)                | 23 |
| 5.1   | Interface Bus                                        | 23 |
| 5.2   | Transferring Data Bits                               | 23 |
| 5.3   | START and STOP Conditions                            | 23 |
| 5.4   | Address Byte Format                                  | 24 |
| 5.5   | Data Byte Format                                     | 24 |
| 5.6   | Combining Address and Data Bytes into a Transmission | 25 |
| 6     | Revision History                                     | 26 |
| 7     | Notes                                                | 27 |

# 1 Module Overview

## 1.1 PCB Connections

The TM4301B is composed two PCBs: a Module PCB (10-01111-A0) and a Sensor PCB (10-01093-B0). The reference designators shown below for various connectors will use an “S” prefix when the connector is located on the sensor PCB (for example “S-J1”). Reference designators without a prefix are located on the Module PCB.

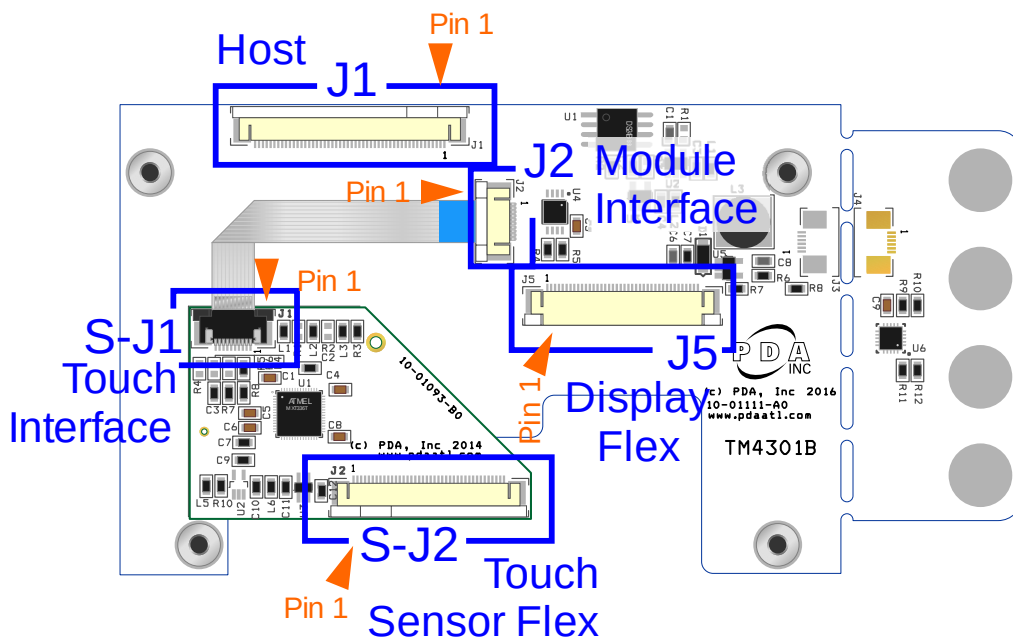

**Figure 1 - PCB Connectors**

NOTE: Insert flex in Connector J6 with contacts facing DOWN.

The following notations are used for pin descriptions:

|     |                        |     |                          |
|-----|------------------------|-----|--------------------------|
| I   | Input only             | OD  | Open drain output        |
| O   | Output only, push-pull | P   | Ground or power          |
| MXT | maXTouch touchscreen   | QT  | QTouch Button Controller |
| EE  | Serial EEPROM          | LCD | LCD Panel                |

NOTE: Except where noted otherwise, inputs and output are defined from the standpoint of the Touch Module PCB.

## 1.2 Host Interface J1

Connector J1 implements Microchip's "XPRO LCD" connector found on various Xplained and Xplained Pro evaluation kits.

Connector J1 connects to the host provides interface between the host and (1) the MaXTouch Touch Controller, (2) the QTtouch Button Controller, (3) LCD Panel, and (4) serial EEPROM.

Suggested Flex:

Wurth Electronics #687 650 100 002,

Description: 0.5mm pitch 50 position FFC, Length 100mm

Flex should be inserted with contacts **facing DOWN**.

| Pin | Type | Description        | MXT | LCD | QT | EE |
|-----|------|--------------------|-----|-----|----|----|
| 1   | I/O  | One-Wire Interface |     |     |    | •  |
| 2   | P    | GND                |     |     |    |    |
| 3   | I    | LCD_DATA_0         |     | •   |    |    |
| 4   | I    | LCD_DATA_1         |     | •   |    |    |
| 5   | I    | LCD_DATA_2         |     | •   |    |    |
| 6   | I    | LCD_DATA_3         |     | •   |    |    |
| 7   | P    | GND                |     |     |    |    |
| 8   | I    | LCD_DATA_4         |     | •   |    |    |
| 9   | I    | LCD_DATA_5         |     | •   |    |    |
| 10  | I    | LCD_DATA_6         |     | •   |    |    |
| 11  | I    | LCD_DATA_7         |     | •   |    |    |
| 12  | P    | GND                |     |     |    |    |
| 13  | I    | LCD_DATA_8         |     | •   |    |    |
| 14  | I    | LCD_DATA_9         |     | •   |    |    |
| 15  | I    | LCD_DATA_10        |     | •   |    |    |
| 16  | I    | LCD_DATA_11        |     | •   |    |    |
| 17  | P    | GND                |     |     |    |    |
| 18  | I    | LCD_DATA_12        |     | •   |    |    |
| 19  | I    | LCD_DATA_13        |     | •   |    |    |
| 20  | I    | LCD_DATA_14        |     | •   |    |    |
| 21  | I    | LCD_DATA_15        |     | •   |    |    |
| 22  | P    | GND                |     |     |    |    |
| 23  | I    | LCD_DATA_16        |     | •   |    |    |
| 24  | I    | LCD_DATA_17        |     | •   |    |    |
| 25  | I    | LCD_DATA_18        |     | •   |    |    |

| Pin | Type | Description          | MXT | LCD | QT | EE |
|-----|------|----------------------|-----|-----|----|----|
| 26  | I    | LCD_DATA_19          |     | •   |    |    |
| 27  | P    | GND                  |     |     |    |    |
| 28  | I    | LCD_DATA_20          |     | •   |    |    |
| 29  | I    | LCD_DATA_21          |     | •   |    |    |
| 30  | I    | LCD_DATA_22          |     | •   |    |    |
| 31  | I    | LCD_DATA_23          |     | •   |    |    |
| 32  | P    | GND                  |     |     |    |    |
| 33  | I    | PCLK                 |     | •   |    |    |
| 34  | I    | VSYSN                |     | •   |    |    |
| 35  | I    | HSYSN                |     | •   |    |    |
| 36  | I    | DE                   |     | •   |    |    |
| 37  | -    | N/C                  |     |     |    |    |
| 38  | -    | N/C                  |     |     |    |    |
| 39  | -    | N/C                  |     |     |    |    |
| 40  | -    | N/C                  |     |     |    |    |
| 41  | I    | DISP                 |     | •   |    |    |
| 42  | I    | I <sup>2</sup> C SDA | •   |     | •  |    |
| 43  | I/O  | I <sup>2</sup> C SCL | •   |     | •  |    |
| 44  | O    | ~MXT_CHG             | •   |     |    |    |
| 45  | O    | ~QT_CHG              |     |     | •  |    |
| 46  | I    | LCD_PWM              |     | •   |    |    |
| 47  | I    | ~RESET               | •   |     | •  |    |
| 48  | P    | +5Vdc                |     |     |    |    |
| 49  | P    | +5Vdc                |     |     |    |    |
| 50  | P    | GND                  |     |     |    |    |

### 1.3 Touch Interface Connector J2

Connector J2 connects to the Sensor PCB and carries signals between the host and the MaXTouch Touch Controller.

Flex should be inserted with contacts **facing DOWN**.

| Pin | Type | Description          |
|-----|------|----------------------|
| 1   | O    | I <sup>2</sup> C SCL |
| 2   | I/O  | I <sup>2</sup> C SDA |
| 3   | O    | ~MXT_RESET           |
| 4   | I    | ~MXT_CHG             |
| 5   | P    | V <sub>DD</sub>      |

| Pin | Type | Description      |
|-----|------|------------------|
| 5   | P    | GND              |
| 5   | P    | AV <sub>DD</sub> |
| 8   | -    | N/C              |
| 9   | -    | N/C              |
| 10  | P    | GND              |

### 1.4 Module Interface Connector S-J1

Connector J1 *located on the Sensor PCB* connects to the Module PCB and carries signals between the MaXTouch Touch Controller and the host

NOTE: Inputs and output are defined from the standpoint of the Sensor PCB.

Flex should be inserted with contacts **facing UP**.

| Pin | Type | Description          |
|-----|------|----------------------|
| 1   | O    | I <sup>2</sup> C SCL |
| 2   | I/O  | I <sup>2</sup> C SDA |
| 3   | O    | ~MXT_RESET           |
| 4   | I    | ~MXT_CHG             |
| 5   | P    | V <sub>DD</sub>      |

| Pin | Type | Description      |
|-----|------|------------------|
| 5   | P    | GND              |
| 5   | P    | AV <sub>DD</sub> |
| 8   | -    | N/C              |
| 9   | -    | N/C              |
| 10  | P    | GND              |

## 1.5 Navigation Button Connector J3 & J4

Optionally connects to the Navigation Button PCB and carries signals between the host and the QTouch Controller used to detect input on the Nav buttons.

While navigation buttons can be used in place, the module PCB was designed to allow removal and optional 'remote' use of the buttons. The button PCB can be separated by carefully cutting the PCB along the scoring, ensuring cut traces (top and bottom) are not shorted. Populate connectors J3 (on the module PCB) and J4 (on the Nav button PCB) and connect using a flex cable.

Suggested Connector:

TE 1734839-6

Suggested Flex:

Würth Electronics #687 606 LLL 002,

Description: 0.5mm pitch 6 position FFC, Length *LLL*mm

Flex should be inserted with contacts **facing DOWN**.

| J3<br>Pin | J3<br>Type | Description          | J4<br>Pin | J4<br>Type |
|-----------|------------|----------------------|-----------|------------|
| 1         | P          | V <sub>DD</sub>      | 6         | P          |
| 2         | O          | ~QT_RESET            | 5         | I          |
| 3         | I          | ~QT_CHG              | 4         | O          |
| 4         | O          | I <sup>2</sup> C SCL | 3         | I          |
| 5         | I/O        | I <sup>2</sup> C SDA | 2         | I/O        |
| 6         | P          | GND                  | 1         | P          |

## 1.6 Display Flex Connector J5

Connector J5 connects to the LCD panel flex and carries signals between the host and the LCD Panel.

NOTE: Pin 1 on the Module PCB aligns to pin 40 on the LCM flex.

Flex should be inserted with contacts **facing UP**.

| Pin | Type | Description     |
|-----|------|-----------------|
| 1   | -    | N/C             |
| 2   | -    | N/C             |
| 3   | -    | N/C             |
| 4   | -    | N/C             |
| 5   | P    | GND             |
| 6   | -    | N/C             |
| 7   | O    | DE              |
| 8   | O    | VSYNC           |
| 9   | O    | HSYNC           |
| 10  | O    | DISP            |
| 11  | O    | PCLK            |
| 12  | P    | GND             |
| 13  | O    | LCD_DATA_7 / B7 |
| 14  | O    | LCD_DATA_6 / B6 |
| 15  | O    | LCD_DATA_5 / B5 |
| 16  | O    | LCD_DATA_4 / B4 |
| 17  | O    | LCD_DATA_3 / B3 |
| 18  | O    | LCD_DATA_2 / B2 |
| 19  | O    | LCD_DATA_1 / B1 |
| 20  | O    | LCD_DATA_0 / B0 |

| Pin | Type | Description      |
|-----|------|------------------|
| 21  | O    | LCD_DATA_15 / G7 |
| 22  | O    | LCD_DATA_14 / G6 |
| 23  | O    | LCD_DATA_13 / G5 |
| 24  | O    | LCD_DATA_12 / G4 |
| 25  | O    | LCD_DATA_11 / G3 |
| 26  | O    | LCD_DATA_10 / G2 |
| 27  | O    | LCD_DATA_9 / G1  |
| 28  | O    | LCD_DATA_8 / G0  |
| 29  | O    | LCD_DATA_23 / R7 |
| 30  | O    | LCD_DATA_22 / R6 |
| 31  | O    | LCD_DATA_21 / R5 |
| 32  | O    | LCD_DATA_20 / R4 |
| 33  | O    | LCD_DATA_19 / R3 |
| 34  | O    | LCD_DATA_18 / R2 |
| 35  | O    | LCD_DATA_17 / R1 |
| 36  | O    | LCD_DATA_16 / R0 |
| 37  | P    | +3.3Vdc          |
| 38  | P    | GND              |
| 39  | P    | LED+             |
| 40  | P    | LED-             |



## 1.7 Touch Sensor Flex Connector S-J2

Connector S-J2 connects to the touch sensor flex and carries signals used by the maXTouch controller to detect input on the touch sensor.

| Pin | Type | Description |
|-----|------|-------------|
| 1   | P    | GND         |
| 15  | I/O  | X23         |
| 14  | I/O  | X22         |
| 13  | I/O  | X21         |
| 12  | I/O  | X20         |
| 11  | I/O  | X19         |
| 10  | I/O  | X18         |
| 9   | I/O  | X17         |
| 8   | I/O  | X16         |
| 7   | I/O  | X15         |
| 6   | I/O  | X14         |
| 5   | I/O  | X13         |
| 4   | I/O  | X12         |
| 3   | I/O  | X11         |
| 2   | I/O  | X10         |
| 16  | I/O  | X9          |
| 17  | I/O  | X8          |
| 18  | I/O  | X7          |
| 19  | I/O  | X6          |
| 20  | I/O  | X5          |

| Pin | Type | Description |
|-----|------|-------------|
| 21  | I/O  | X4          |
| 35  | I/O  | X3          |
| 34  | I/O  | X2          |
| 33  | I/O  | X1          |
| 32  | I/O  | X0          |
| 31  | I/O  | S0          |
| 30  | I/O  | Y0          |
| 29  | I/O  | Y1          |
| 28  | I/O  | Y2          |
| 27  | I/O  | Y3          |
| 26  | I/O  | Y4          |
| 25  | I/O  | Y5          |
| 24  | I/O  | Y6          |
| 23  | I/O  | Y7          |
| 22  | I/O  | Y8          |
| 36  | I/O  | Y9          |
| 37  | I/O  | Y10         |
| 38  | I/O  | Y11         |
| 39  | I/O  | Y12         |
| 40  | I/O  | Y13         |

## 2 Overview of the 4.3in PCAP Touch Module

### 2.1 Introduction

The 4.3in PCAP Touch Module is a touchscreen module offering best-in-class projected capacitance multi-touch functionality combined with a 4.3in LCD panel. The module is configured for development and evaluation with several Microchip PIC32- and ARM-based evaluation solutions as well as development and integration with a custom host system.

For convenience, this module features Atmel's "Xplained Pro LCD" connector ([J1](#)) for use with Xplained and Xplained Pro/Ultra evaluation hardware. In addition, a "MEB adapter" board is available in the 90-00123-B1 assembly for connecting to PIC32 kits. See [Section 3.1.2.1](#) for details.

As shown in Figure 2 below, several sub-system components are accessible to maximize effective integration.

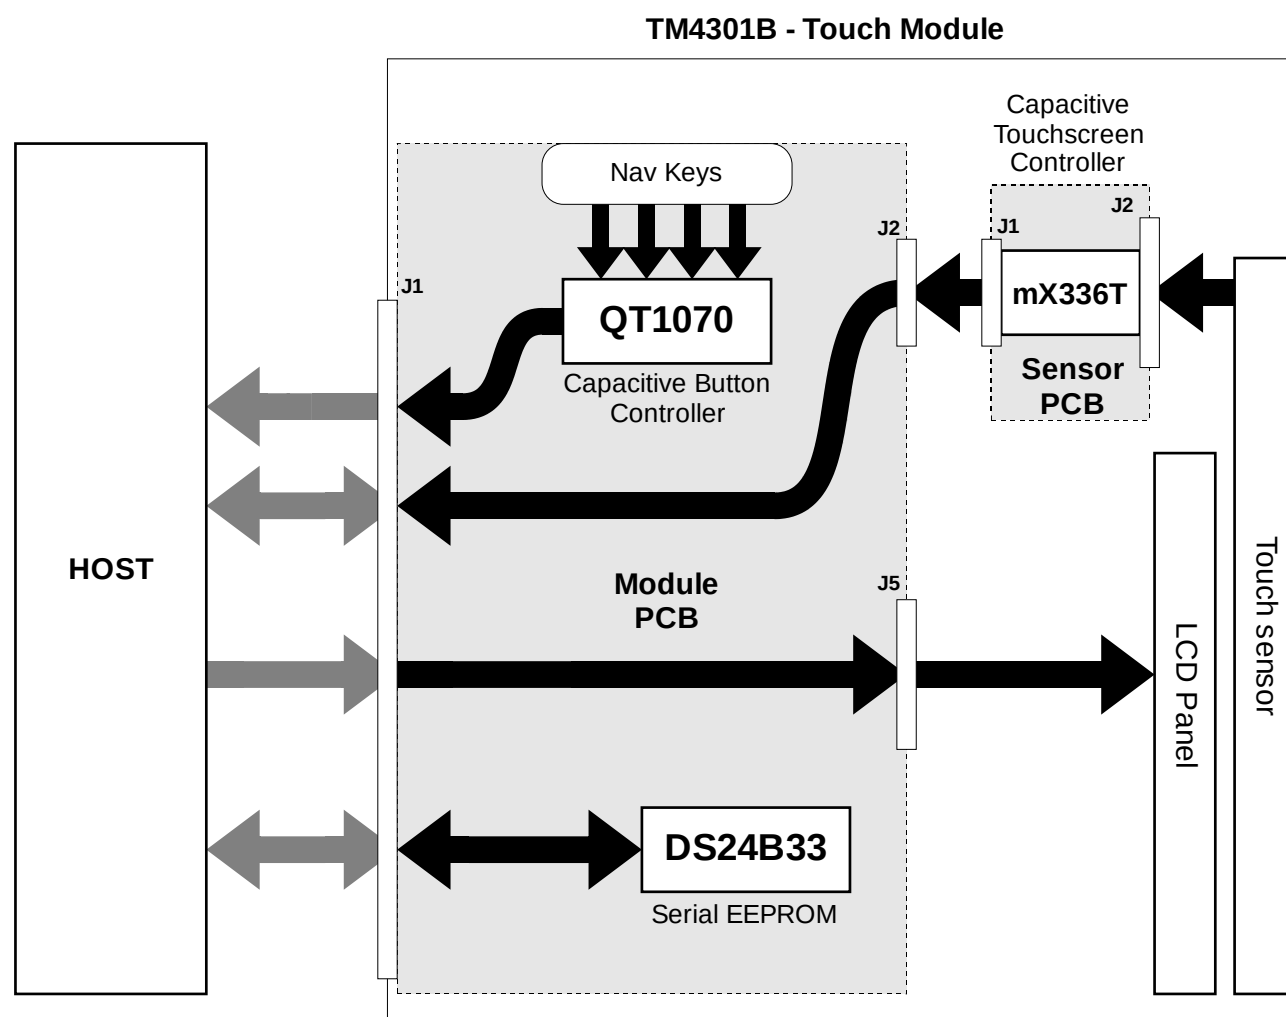


Figure 2 - Functional Block Diagram

## 2.2 Understanding Unfamiliar Concepts

Throughout this document, the functionality of the module sub-system will be outlined and summarized. However, the user is encouraged to refer to the resources and documents below in order to gain a more thorough understanding of each sub-system.

- For a basic overview of I<sup>2</sup>C communication, refer to [Section 5](#) of this document
- Microchip maXTouch mXT336T (<http://www.microchip.com/.../maxtouch>)
- Microchip QTouch QT1070 Datasheet (<https://www.microchip.com/.../AT42QT1070>)
- Maxim DS24B33 Datasheet ([www.maximintegrated.com](http://www.maximintegrated.com))

In addition, when developing or evaluating with the Microchip ARM-based EK's, it is recommended that the user visit [www.at91.com](http://www.at91.com) which contains a broad range of resources for the EK's and the ARM devices they feature.

## 2.3 LCD Panel

The module provides the host with a direct connection ([Connector J1](#)) to the LCD panel interface ([Connector J5](#)). Aside from generating supply voltages for the LED backlight and providing backlight control to the host, no display panel control is performed by the module.

## 2.4 maXTouch Capacitive Touchscreen Controller

The module touch screen interface is based on the Microchip maXTouch mXT336T Touch Controller and operates using the touch sensor at [Connector S-J2](#).

The touch controller scans the touch sensor and will signal the host with an active low interrupt signal (~MXT\_CHG on [Connector J1](#)) when new touch data is available. Data communication with the maXTouch controller is performed over a shared I<sup>2</sup>C interface (I<sup>2</sup>C SCL and I<sup>2</sup>C SDA on [J1](#)). The I<sup>2</sup>C address of the touch controller is 0x4A.

**NOTE:** The TM4301B has pull-up resistors on the maXTouch ~CHG\_mxt interrupt signal located at R8 on the sensor PCB. There are no external pull-ups on the I<sup>2</sup>C SCL and I<sup>2</sup>C SDA signals – the host must provide pull-up for these signals.

### 2.4.1 maXTouch Controller Interface

Details of the maXTouch communication protocol are beyond the scope of this document. However information is provided in Section 3.2 below to facilitate evaluation and initial development.



**This module is pre-loaded with a configuration already optimized for this touch sensor and panel, so the developer need only focus on interfacing with the device. When developing the maXTouch controller interface during evaluation and host development, care should be taken to avoid changing the maXTouch configuration or committing changes to NV storage on the maXTouch controller.**

To get started with host interface development, the user is *strongly* encouraged to leverage existing code available from the resources outlined in Sections 3.2.

## 2.5 QTouch Capacitive Button Controller

The module's "nav key" interface is based on the Microchip QT1070 7-Channel Capacitive Sensor Driver.

The button controller scans the 4 capacitive nav keys (K1, K2, K3 and K4) and will signal the host with an active low interrupt signal (~QT\_CHG on [Connector J1](#)) when a touch event has occurred. Data communication with the QT1070 controller is performed over a shared I<sup>2</sup>C interface (I<sup>2</sup>C SCL and I<sup>2</sup>C SDA on [J1](#)). The I<sup>2</sup>C address of the button controller is 0x1B and cannot be changed.

**NOTE: The TM4301B has pull-up resistors on the QTouch ~CHG interrupt signal located at R8. There are no external pull-ups on the I<sup>2</sup>C SCL and I<sup>2</sup>C SDA signals – the host must provide pull-up for these signals.**

### 2.5.1 QTouch Controller Interface

Details of the QTouch communication protocol are beyond the scope of this document. The user is encouraged to review the QT1070 Datasheet (<https://www.microchip.com/.../AT42QT1070>).

## 2.6 Serial EEPROM

The module includes a DS24B33 Serial EEPROM providing 512 bytes of non-volatile storage. Data communication with the EEPROM is performed over a One-Wire Interface. The EEPROM is not used by another subsystem on the touch module and can be freely used by the host system for any purpose. For example, Microchip ARM-based EK's running Linux or Android operating systems use the pre-programmed contents of the EEPROM to identify this module type.



**NOTE: The user should take care if choosing to overwrite the pre-programmed EEPROM contents. As noted above, certain builds of Linux or Android provided by Microchip and targeted for the Microchip ARM-based EKs use the EEPROM contents to identify the module and may no longer recognize the module. The user is advised to back up the EEPROM contents before overwriting.**

The serial EEPROM communicates via a one-wire interface ("One-Wire Interface" on [J5](#) or [J6](#)). Refer to the DS24B33 Datasheet ([www.maximintegrated.com](http://www.maximintegrated.com)) for details.

### 3 Getting Started

This module was designed to install on a variety of Microchip ARM-based EK's including the SAMA5D3 Xplained, SAMA5D4 Xplained Ultra, SAMA5D2 Xplained Ultra and the SAMV71 Xplained Ultra among others. Hardware connectivity with Microchip PIC32MZ kits is also supported. With example projects and prebuilt Linux and/or Android images available for many of these evaluation platforms, this provides the fastest way to evaluate the performance of the touchscreen and display using a familiar, full-featured OS or lightweight bare-metal code.

The following sections provide *basic* information related to using and evaluating the Touch Module. Visit Precision Design Associates website ( [www.pdaatl.com](http://www.pdaatl.com) ) or Microchip's AT91 Community website ( [www.at91.com](http://www.at91.com) ) for more information related to this touch module or guidance appropriate for your specific EK.

#### 3.1 Hardware Connections


The module interfaces with host hardware or an evaluation board via the flex connector, [J1](#). See details in the following sections and refer to the specific kit documentation for more information.

##### 3.1.1 Microchip XPRO Kits

The host interface connector, [J1](#), matches the "XPRO LCD" interface found on many Xplained or Xplained Ultra kits. The module connected directly as described in [Section 1.2](#).

##### 3.1.2 Microchip PIC32MZ Kits

This touch module can interface with a Microchip PIC32MZ Multimedia Expansion Board (MEB) II (<http://www.microchip.com/developmenttools/ProductDetails/DM320005-5>) through the use of the "MEB Adapter" P/N 10-01120-A0 (contact PDA for details, included in the 90-00123-B1 assy). A flex cable connected to J1 on the touch module PCB is connected to J2 on the MEB Adapter.

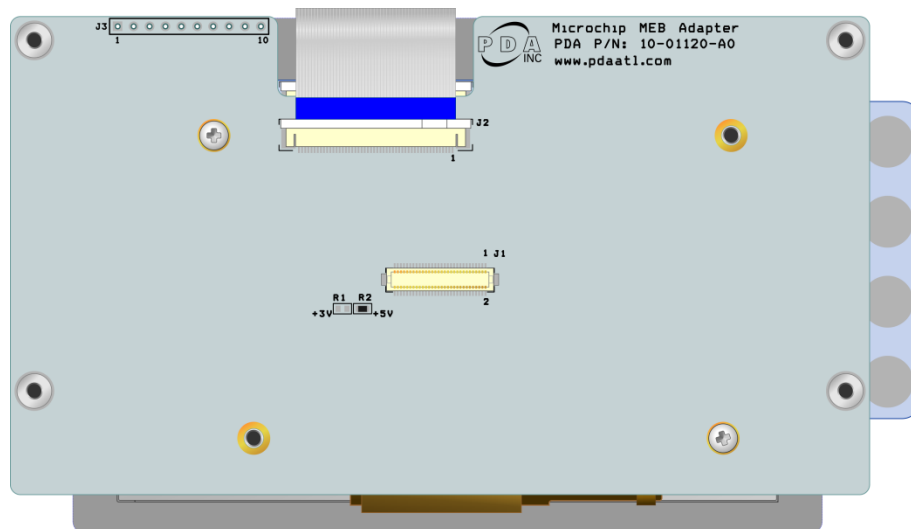

**Figure 3 – TM4301B w/ MEB Adapter**

The board-to-board connector (J2) on the MEB Adapter connects to the Display Connector J4 on the MEB II PCB. The through holes can be used to secure the MEB adapter to the touch module and the PEM nut standoffs can be used to secure the touch module to the MEB II PCB.

### 3.1.2.1 MEB Adapter Display Connector J1

The board-to-board connector (J1) on the MEB adapter matches the MEB II display connector. Refer to the MEB II documentation for more information.

Mating connector: Hirose DF12(3.0)-60DP-0.5V(86)

| Pin | Type | Description | MXT | LCD | QT | EE |
|-----|------|-------------|-----|-----|----|----|
| 1   | P    | GND         |     |     |    |    |
| 2   | P    | GND         |     |     |    |    |
| 3   | -    | N/C         |     |     |    |    |
| 4   | -    | N/C         |     |     |    |    |
| 5   | P    | GND         |     |     |    |    |
| 6   | P    | GND         |     |     |    |    |
| 7   | P    | +3.3Vdc     |     |     |    |    |
| 8   | P    | +3.3Vdc     |     |     |    |    |
| 9   | I    | LCD_DATA_12 |     | •   |    |    |
| 10  | I    | LCD_DATA_8  |     | •   |    |    |
| 11  | I    | LCD_DATA_13 |     | •   |    |    |
| 12  | I    | LCD_DATA_9  |     | •   |    |    |
| 13  | I    | LCD_DATA_14 |     | •   |    |    |
| 14  | I    | LCD_DATA_10 |     | •   |    |    |
| 15  | I    | LCD_DATA_15 |     | •   |    |    |
| 16  | I    | LCD_DATA_11 |     | •   |    |    |
| 17  | I    | LCD_DATA_16 |     | •   |    |    |
| 18  | I    | LCD_DATA_0  |     | •   |    |    |
| 19  | I    | LCD_DATA_17 |     | •   |    |    |
| 20  | I    | LCD_DATA_1  |     | •   |    |    |
| 21  | I    | LCD_DATA_18 |     | •   |    |    |
| 22  | I    | LCD_DATA_2  |     | •   |    |    |
| 23  | I    | LCD_DATA_19 |     | •   |    |    |
| 24  | I    | LCD_DATA_3  |     | •   |    |    |
| 25  | I    | LCD_DATA_20 |     | •   |    |    |
| 26  | I    | LCD_DATA_4  |     | •   |    |    |
| 27  | P    | GND         |     |     |    |    |
| 28  | P    | GND         |     |     |    |    |
| 29  | P    | +3.3Vdc     |     |     |    |    |
| 30  | P    | +3.3Vdc     |     |     |    |    |

| Pin | Type | Description          | MXT | LCD | QT | EE |
|-----|------|----------------------|-----|-----|----|----|
| 31  | I    | LCD_DATA_21          |     | •   |    |    |
| 32  | I    | LCD_DATA_5           |     | •   |    |    |
| 33  | I    | LCD_DATA_22          |     | •   |    |    |
| 34  | I    | LCD_DATA_6           |     | •   |    |    |
| 35  | I    | LCD_DATA_23          |     | •   |    |    |
| 36  | I    | LCD_DATA_7           |     | •   |    |    |
| 37  | I    | PCLK                 |     | •   |    |    |
| 38  | I/O  | One-wire interface   |     |     |    | •  |
| 39  | I    | VSYN                 |     | •   |    |    |
| 40  | I    | HSYN                 |     | •   |    |    |
| 41  | I    | DE                   |     | •   |    |    |
| 42  | -    | N/C                  |     |     |    |    |
| 43  | O    | ~MXT_CHG             | •   |     |    |    |
| 44  | I    | I <sup>2</sup> C SCL | •   |     | •  |    |
| 45  | -    | N/C                  |     |     |    |    |
| 46  | I/O  | I <sup>2</sup> C SDA | •   |     | •  |    |
| 47  | I    | LCD_PWM              |     | •   |    |    |
| 48  | I    | DISP <sup>1</sup>    |     | •   |    |    |
| 49  | P    | GND                  |     |     |    |    |
| 50  | P    | GND                  |     |     |    |    |
| 51  | P    | +5Vdc                |     |     |    |    |
| 52  | P    | +5Vdc                |     |     |    |    |
| 53  | O    | ~QT_CHG              |     |     | •  |    |
| 54  | I    | SCK (not used)       |     |     |    |    |
| 55  | I    | ~RESET               | •   |     | •  |    |
| 56  | I    | MOSI (not used)      |     |     |    |    |
| 57  | O    | MISO (not used)      |     |     |    |    |
| 58  | I    | SS (not used)        |     |     |    |    |
| 59  | P    | GND                  |     |     |    |    |
| 60  | P    | GND                  |     |     |    |    |

NOTE 1: Touch Module "DISP" signal is connected to MEB "LCD\_Reset". When driven low, the display is in standby mode.

## 3.2 Software

Several options exist when developing for the touch module whether targeting a custom host or a Microchip EK.

### 3.2.1 MPLab Harmony Framework

Microchip's MPLab IDE ( <http://www.microchip.com/mplab/mplab-ide-home> ) is an IDE and collection of tools that can be used when developing for Microchips silicon. The MPLAB Harmony Integrated Software Framework ( <http://www.microchip.com/mplab/mplab-harmony> ) is a collection of reusable modules for the PIC32 family of microcontrollers. Refer to the links above for specific support.

### 3.2.2 Linux Kernel / Android

The Linux Kernel ( [www.kernel.org](http://www.kernel.org) ) has included basic support for maXTouch touch devices since version 2.6.36. The mainline driver has undergone considerable evolution since then.

Microchip hosts the AT91 community website with resources dedicated to developing on their EKs for Android ( [www.at91.com/android4sam/](http://www.at91.com/android4sam/) ) and Linux ( [www.at91.com/linux4sam/](http://www.at91.com/linux4sam/) )

Finally, Microchip maintains an up-to-date driver ( [www.github.com/atmel-maxtouch/linux](https://www.github.com/atmel-maxtouch/linux) ) which includes numerous out-of-cycle improvements to the mainline Linux Kernel maXTouch driver.

### 3.2.3 Advanced Software Framework

The Advanced Software Framework ( [asf.microchip.com](http://asf.microchip.com) ) contains examples of code for interfacing with devices in the maXTouch family of touch controllers. The capabilities of various maXTouch devices may differ, but the basic communication protocol is common and can be applied to this module.

### 3.2.4 Microchip Software Packages

Many of Microchip's Xplained kits have corresponding "Software packages" available ( [www.microchip.com/design-centers/32-bit/softpacks](http://www.microchip.com/design-centers/32-bit/softpacks) ) with example projects which can be built using MPLAB, Atmel START or Atmel Studio (and/or other) toolchains. Many of these software packages include examples directly supporting or written for the PDA TMxxxx modules.

## 3.3 Using the Touch Module

### 3.3.1 Navigation Keys

When using this module with one of the standard Android demo builds, the navigation keys function as shown in Table 3-1 below:

**Table 3-1 - Navigation Key Function (Android)**

| Key | Navigation Function                                                                               |
|-----|---------------------------------------------------------------------------------------------------|
| K1  |  Back          |
| K2  |  Menu          |
| K3  |  Home          |
| K4  |  Power / Sleep |

### 3.3.2 Evaluating the Touch Module

For effective evaluation of the module – the touch sensor and the LCD panel in particular – the user is encouraged to try the following applications and tools depending on the host OS.

### 3.3.2.1 Android

The following Android apps available from Google Play:

[TouchTest](#) by Moonblink

[Dotty](#) by Gerry Steele

[Multitouch Visible Test](#) by Battery Powered Games

[Screen Test](#) by Amberfog

### 3.3.2.2 Linux

The user can perform simple touch / drawing test using the `ts_test` utility that is part of **tslib**.




## 4 Specifications

For complete specifications, refer to the datasheets listed in section 2.2 for the various sub-system components outlined in sections 2.3 through 2.6.


### 4.1 Mechanical Specifications

Contact PDA for drawings and CAD models available.

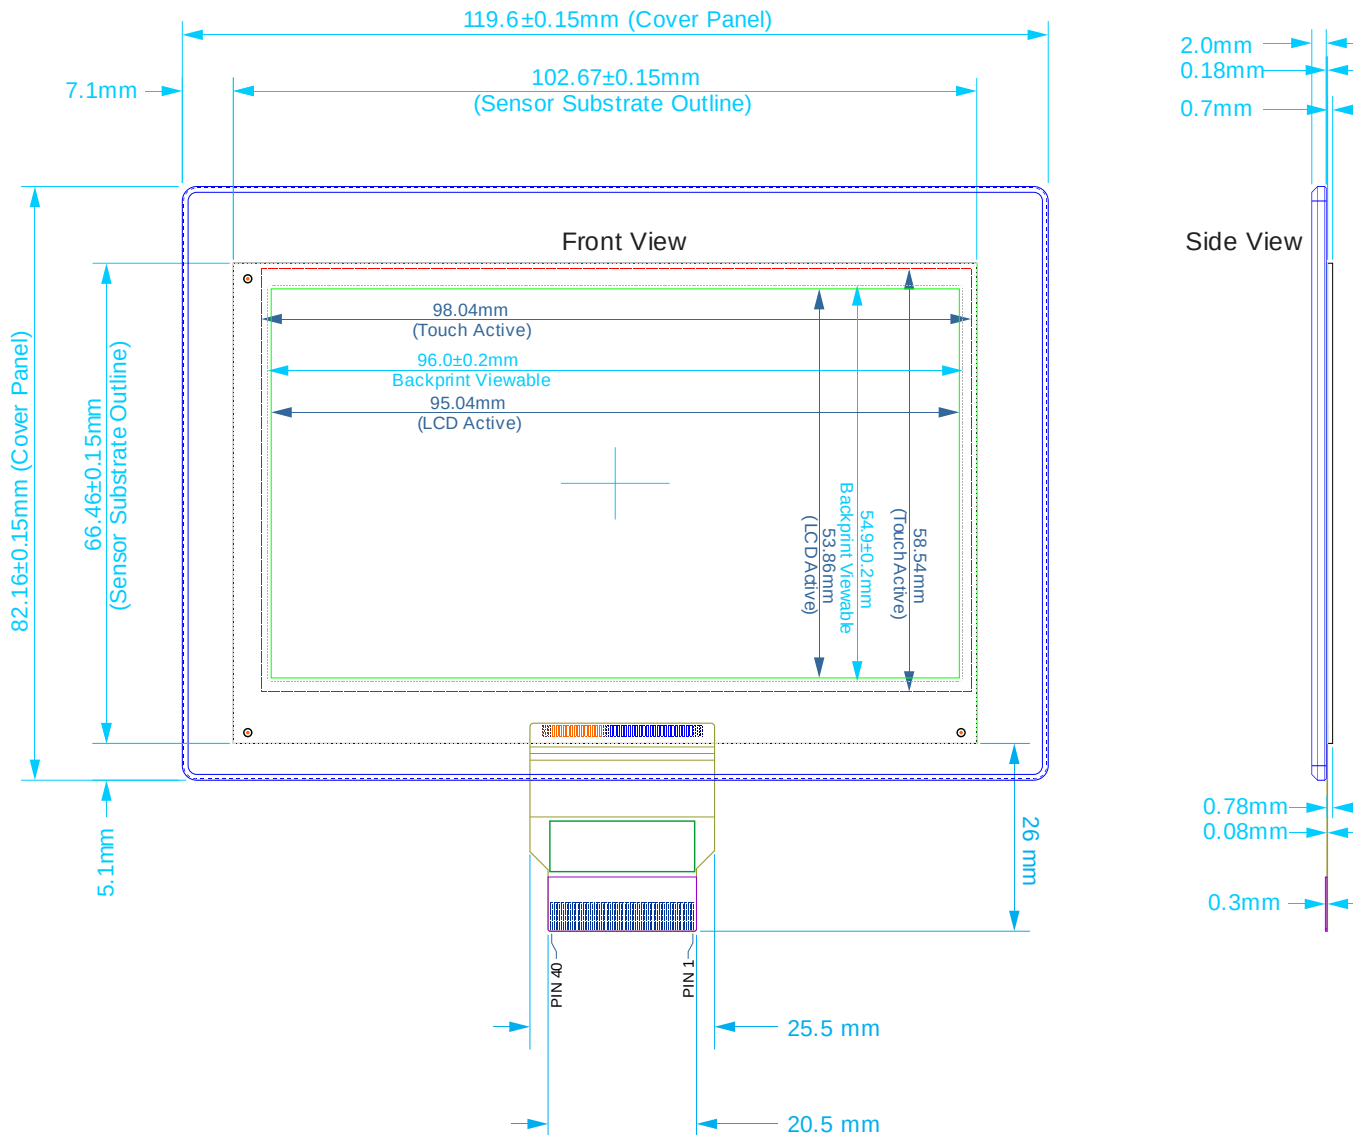

**Figure 4 - Sensor Only Dimensions**

Sensor Assy (P/N: 90-00089-A0) may be purchased individually.  
Minimum order quantities apply. Contact PDA for details.

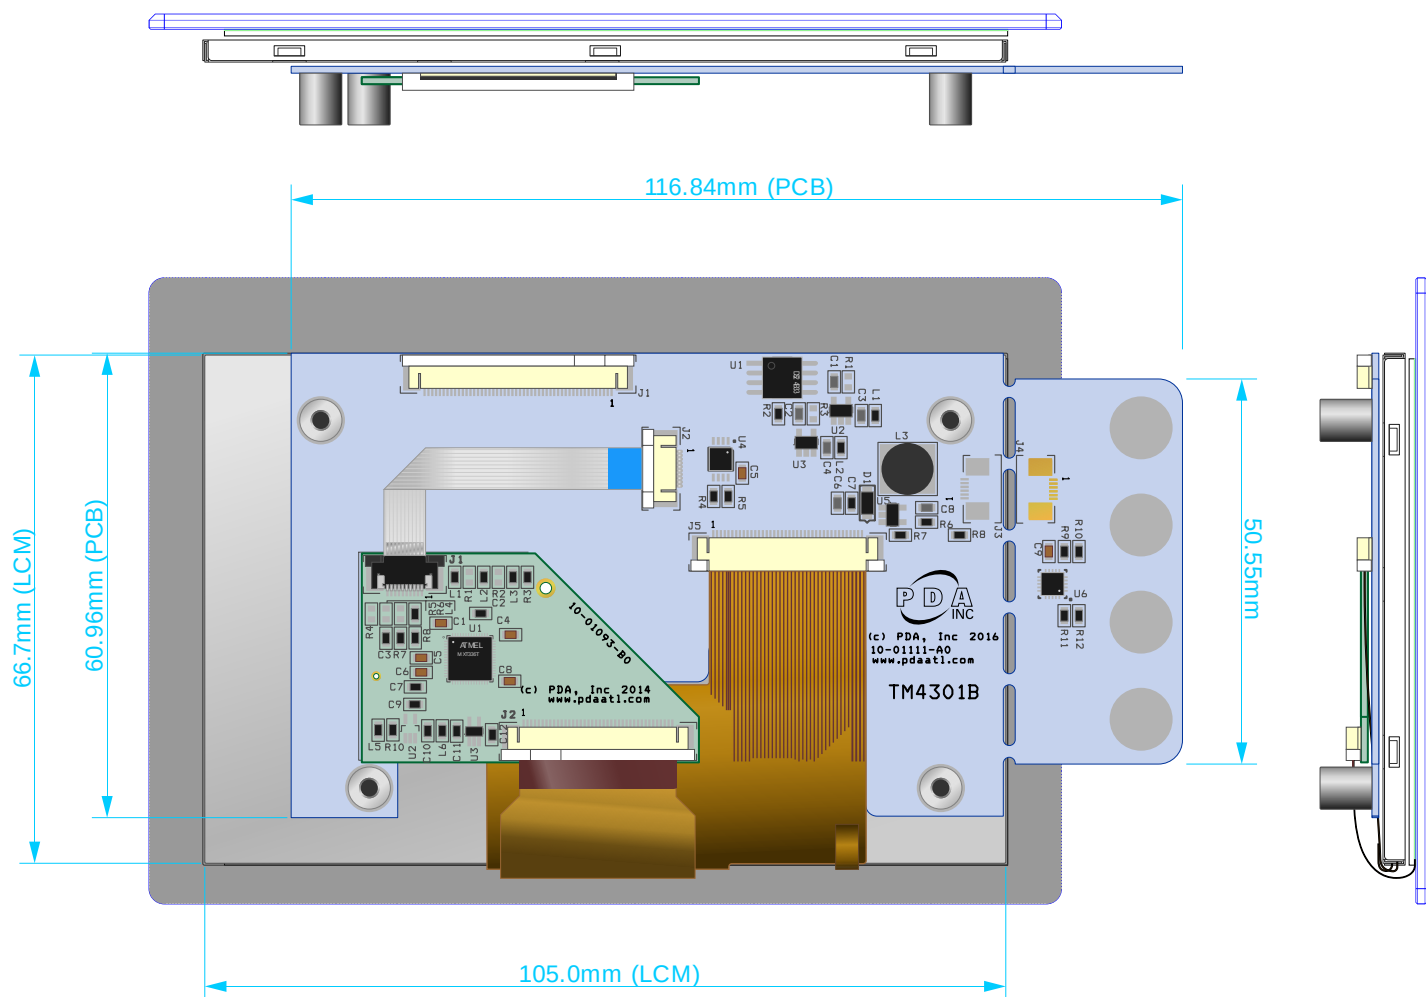

**Figure 5 – Module Dimensions**

## 4.2 Absolute Maximum Specifications

| Parameter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Value                      |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|
| Operating temp                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 0°C to + 70°C              |
| Storage temp                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | -40°C to + 85°C            |
| Vdd                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | -0.5 to +6V                |
| Max continuous pin current, any control or drive pin                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | ±40 mA                     |
| Voltage forced onto any pin                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | -0.5V to (Vdd + 0.5) Volts |
|  <b>CAUTION:</b> Stresses beyond those listed under <i>Absolute Maximum Specifications</i> may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or other conditions beyond those indicated in the operational sections of this specification are not implied. Exposure to absolute maximum specification conditions for extended periods may affect device reliability. |                            |

## 4.3 Recommended Operating Conditions

| Parameter             | Value           |
|-----------------------|-----------------|
| Vin                   | 5.0V ±5 percent |
| Supply ripple + noise | ±20 mV          |

## 4.4 DC Specifications

Vin = 5.0V, Vdd=3.3Vdc, Ta = recommended range, unless otherwise noted

| Parameter       | Description            | Min     | Typ | Max       | Units | Notes           |
|-----------------|------------------------|---------|-----|-----------|-------|-----------------|
| V <sub>IL</sub> | Low input logic level  | - 0.5   | –   | 0.3 Vdd   | V     | 1.8V <Vdd <3.3V |
| V <sub>HL</sub> | High input logic level | 0.7 Vdd | –   | Vdd + 0.5 | V     | 1.8V <Vdd <3.3V |
| V <sub>OL</sub> | Low output voltage     | –       | –   | 0.2Vdd    | V     |                 |
| V <sub>OH</sub> | High output voltage    | 0.8Vdd  | –   | –         | V     |                 |
| I <sub>IL</sub> | Input leakage current  | –       | –   | 1         | µA    |                 |

## 4.5 I2C-compatible Bus Specifications

| Parameter                         | Operation   |
|-----------------------------------|-------------|
| Touchscreen Controller Address    | 0x4A        |
| Navigation Key Controller Address | 0x1B        |
| Maximum bus speed (SCL)           | 400 kHz     |
| I2C Specification                 | Version 2.1 |

## 4.6 LCM Specification

Specifications in this section apply only to the LCD panel (PDA P/N: 91-00055-A0).

### 4.6.1 LCM Parameters

| Parameter                   | Value                              |
|-----------------------------|------------------------------------|
| Display Size                | 4.3in                              |
| LCD Type                    | $\alpha$ -Si TFT active matrix     |
| Display Mode                | Normally White, Transmissive       |
| Resolution                  | 480 x RGB x 272                    |
| View Direction (Best Image) | 12 o'clock                         |
| Dimensions                  | 105.5mm (H) x 67.2mm (W) x 3mm (T) |
| Active Area                 | 95.04mm (W) x 53.856mm (H)         |
| Dot Pitch                   | 0.198mm (W) x 0.198mm (H)          |
| Pixel Arrangement           | RGB Stripe                         |
| Display Colors              | 16.7M                              |
| Interface                   | Digital (TTL)                      |
| Driver                      | Himax 8257-A                       |
| Weight                      | 78g                                |

#### 4.6.2 LCM Absolute Maximum Specifications

| Parameter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Description           | Min   | Max | Units |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-------|-----|-------|
| V <sub>CC</sub>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Power Voltage         | -0.3  | 4.5 | V     |
| I <sub>LED</sub>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | LED Current           | 0     | 25  | mA    |
| V <sub>I</sub>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Input Voltage         | - 0.3 | 4.5 | V     |
| T <sub>STG</sub>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Storage temperature   | -30   | 80  | °C    |
| T <sub>OP</sub>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Operating temperature | -20   | 70  | °C    |
|  <b>CAUTION:</b> Stresses beyond those listed under LCM <i>Absolute Maximum Specifications</i> may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or other conditions beyond those indicated in the operational sections of this specification are not implied. Exposure to absolute maximum specification conditions for extended periods may affect device reliability. |                       |       |     |       |

#### 4.6.3 LCM DC Specifications

| Parameter       | Description            | Min                 | Typ | Max                 | Units |
|-----------------|------------------------|---------------------|-----|---------------------|-------|
| V <sub>CC</sub> | Power Supply           | 3.1                 | 3.3 | 3.5                 | V     |
| I <sub>CC</sub> | Current Consumption    | -                   | -   | 25                  | mA    |
| V <sub>IL</sub> | Low input logic level  | 0                   | —   | 0.2 V <sub>CC</sub> | V     |
| V <sub>IH</sub> | High input logic level | 0.8 V <sub>CC</sub> | —   | V <sub>CC</sub>     | V     |

#### 4.6.4 LCM Optical Characteristics

Backlight On (Transmissive Mode).

| Parameter                          | Description                             | Min  | Typ  | Max  | Units             |
|------------------------------------|-----------------------------------------|------|------|------|-------------------|
| L                                  | Luminance                               | —    | 600  | —    | cd/m <sup>2</sup> |
| Y <sub>U</sub>                     | Luminance uniformity                    | 80   | —    | —    | %                 |
| CR                                 | Contrast Ratio                          | —    | 500  | —    |                   |
| T <sub>OFF</sub> + T <sub>ON</sub> | Response Time (90% to 10% + 10% to 90%) | —    | 30   | 45   | ms                |
| W <sub>X</sub>                     | Color Chromaticity                      | 0.23 | 0.28 | 0.33 | —                 |
| W <sub>Y</sub>                     |                                         | 0.25 | 0.30 | 0.35 | —                 |

#### 4.6.5 LCM Timing

| Parameter | Description                         | Min  | Typ | Max | Units     |
|-----------|-------------------------------------|------|-----|-----|-----------|
| $T_{cph}$ | DCLK cycle time                     | 66.6 | -   | -   | ns        |
| $f_{clk}$ | DCLK frequency                      | -    | 9   | 15  | MHz       |
| $t_h$     | Horizontal Period                   | 525  | 525 | 605 | $T_{cph}$ |
| $t_{hd}$  | Horizontal Display Area             | -    | 480 | -   | $T_{cph}$ |
| $t_{hb}$  | Horizontal Back Porch (see note 1)  | 2    | 2   | 41  | $T_{cph}$ |
| $t_{hpw}$ | Horizontal Pulse Width (see note 1) | 2    | 41  | 41  | $T_{cph}$ |
| $t_{hfp}$ | Horizontal Front Porch              | 2    | 2   | 82  | $T_{cph}$ |
| $t_v$     | Vertical Period                     | 285  | 286 | 399 | $T_h$     |
| $t_{vd}$  | Vertical Display Area               | -    | 272 | -   | $T_h$     |
| $t_{vb}$  | Vertical Back Porch (see note 1)    | 1    | 2   | 11  | $T_h$     |
| $t_{vpw}$ | Vertical Pulse Width (see note 1)   | 1    | 10  | 11  | $T_h$     |
| $t_{vfp}$ | Vertical Front Porch                | 1    | 2   | 227 | $T_h$     |

NOTE 1: It is necessary to ensure  $(t_{hpw} + t_{hb}) = 43$  and  $(t_{vpw} + t_{vb}) = 12$

#### 4.7 Power Consumption

| Vdd (V) | Mode                                                                | Idd (mA) |
|---------|---------------------------------------------------------------------|----------|
| +3.3Vdc | maXTouch controller in Free Run, LCD backlight on maximum intensity | 200 max  |

#### 4.8 Part Number


| Part Number | Description                                        |
|-------------|----------------------------------------------------|
| 90-00123-A0 | TM4301B: 4.3in PCAP Touch Module                   |
| 90-00123-B1 | TM4301B: 4.3in PCAP Touch Module w/ MEB II Adapter |

## 5 I2C Basics (I2C-compatible Operation)

### 5.1 Interface Bus

The device communicates with the host over an I<sup>2</sup>C-compatible bus, in accordance with version 2.1 of the I<sup>2</sup>C specification. The following sections give an overview of the bus; more detailed information is available from [www.i2c-bus.org](http://www.i2c-bus.org). Devices are connected to the I<sup>2</sup>C-compatible bus as shown in Figure 6 both bus lines are connected to Vdd via pull-up resistors. The bus drivers of all I<sup>2</sup>C-compatible devices must be open-drain type. This implements a wired “AND” function that allows any and all devices to drive the bus, one at a time. A low level on the bus is generated when a device outputs a zero.


**Figure 6. I<sup>2</sup>C-compatible Interface Bus**

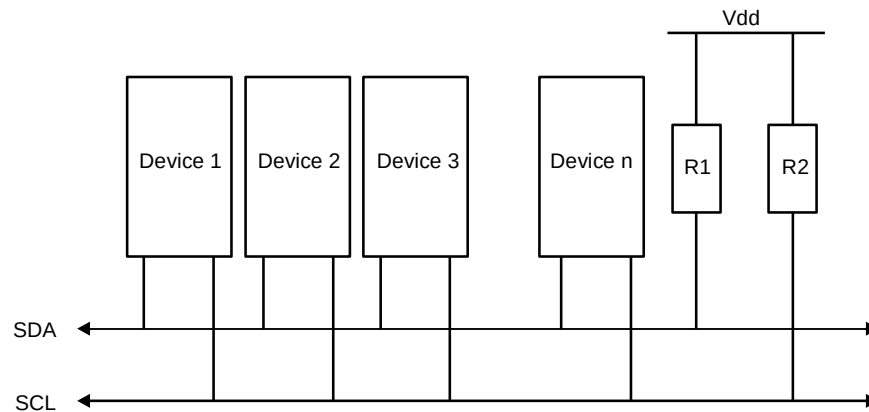

### 5.2 Transferring Data Bits

Each data bit transferred on the bus is accompanied by a pulse on the clock line. The level of the data line must be stable when the clock line is high; the only exception to this rule is for generating START and STOP conditions.


**Figure 7. Data Transfer**

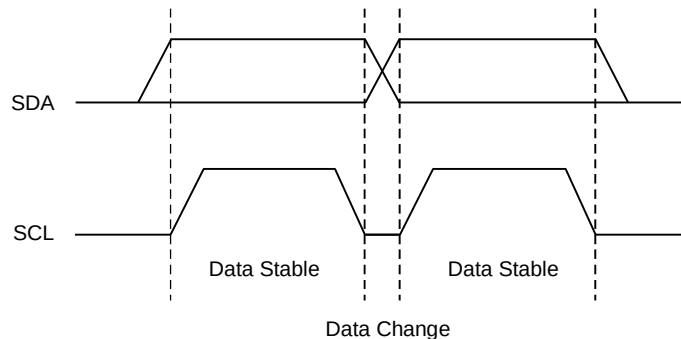

### 5.3 START and STOP Conditions

The host initiates and terminates a data transmission. The transmission is initiated when the host issues a START condition on the bus, and is terminated when the host issues a STOP condition. Between the START and STOP conditions, the bus is considered busy. As shown in Figure 8 START and STOP conditions are signaled by changing the level of the SDA line when the SCL line is high.

**Figure 8. START and STOP Conditions**

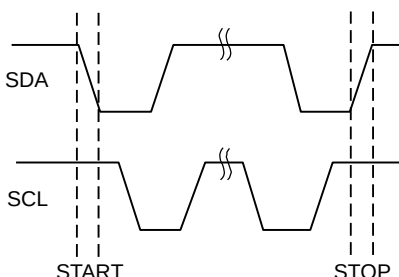


## 5.4 Address Byte Format

All address bytes are 9 bits long. They consist of 7 address bits, one READ/WRITE control bit and an acknowledge bit. If the READ/WRITE bit is set, a read operation is performed. Otherwise a write operation is performed. An address byte consisting of a slave address and a READ or a WRITE bit is called SLA+R or SLA+W, respectively. When the device recognizes that it is being addressed, it acknowledges by pulling SDA low in the ninth SCL (ACK) cycle.

The most significant bit of the address byte is transmitted first.


**Figure 9. Address Byte Format**

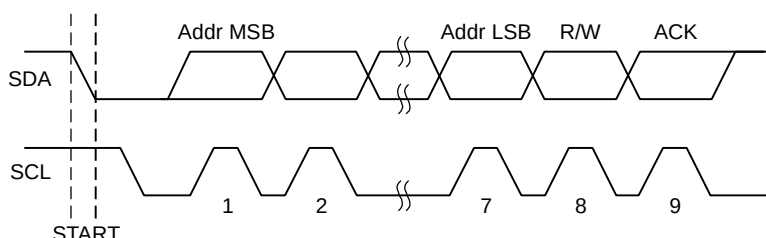

## 5.5 Data Byte Format

All data bytes are 9 bits long, consisting of 8 data bits and an acknowledge bit. During a data transfer, the host generates the clock and the START and STOP conditions. The slave device is responsible for acknowledging the reception. An acknowledge (ACK) is signaled by the slave device pulling the SDA line low during the ninth SCL cycle. If the slave device leaves the SDA line high, a NACK is signaled.

**Figure 10. Data Byte Format**

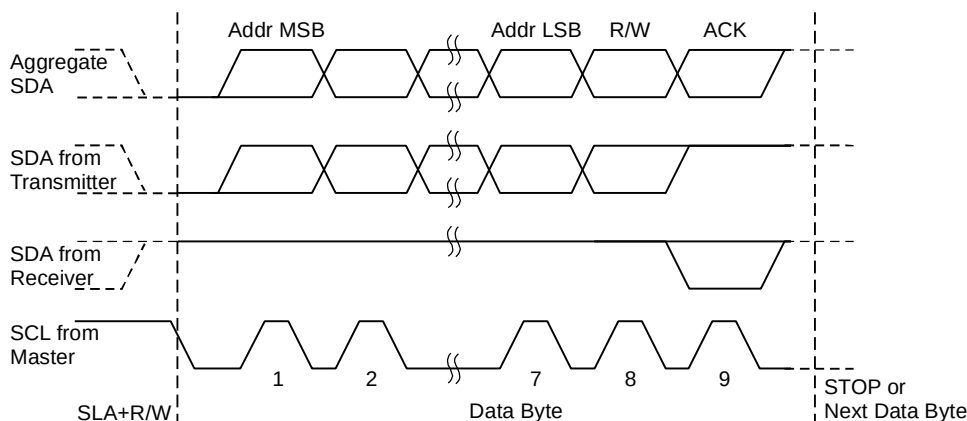




## 5.6 Combining Address and Data Bytes into a Transmission

A transmission consists of a START condition, an SLA+R or SLA+W, one or more data bytes and a STOP condition. The wired “ANDing” of the SCL line is used to implement handshaking between the host and the device. The device extends the SCL low period by pulling the SCL line low whenever it needs extra time for processing between the data transmissions.

Figure 11 shows a typical data transmission. Note that several data bytes can be transmitted between the SLA+R or SLA+W and the STOP.

**Figure 11. Byte Transmission**

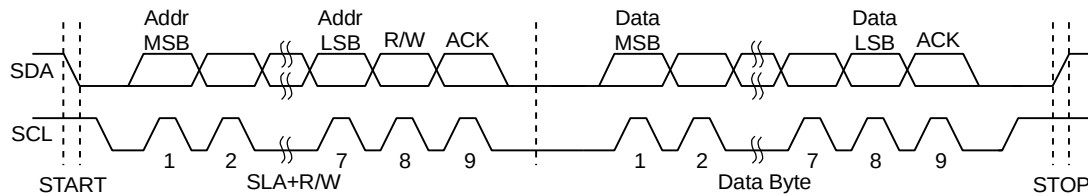

## 6 Revision History

| Revision No. | History                                                                   |
|--------------|---------------------------------------------------------------------------|
| Rev A0       | Initial Release                                                           |
| Rev A1       | Update links, add information regarding 90-00123-B1 assy with MEB adapter |

## 7 Notes



email: [sales@pdaatl.com](mailto:sales@pdaatl.com)

**Precision Design Associates, Inc.**

645 Hembree Parkway, Suite G  
Roswell, GA 30076  
USA

tel: (770)-664-0448



url: <http://www.pdaatl.com>

© 2019 Precision Design Associates. All rights reserved. Microchip®, Atmel®, associated logo and combinations thereof, maXTouch®, QTouch®, and others are registered trademarks of Microchip or its subsidiaries. Other terms and product names may be registered trademarks or trademarks of others.